

How to Replace the Cable

Remove the current cable:


To remove the current cable, please do the following:

- 1) Wrap some tape or other visible marker around the cable you will replace. This tape is simply to help identify which cable will be discarded.
- 2) Firmly grasp the body of the earphone with one hand, then hold the plastic boot of the



3) Pull the cable directly away from the earphone to remove the cable.

NOTE: Use a gentle and steady pressure - sudden yanking may damage the earphone. Gently wiggle or rock the cable while pulling. The cable will be firmly mounted, so be patient and steady.

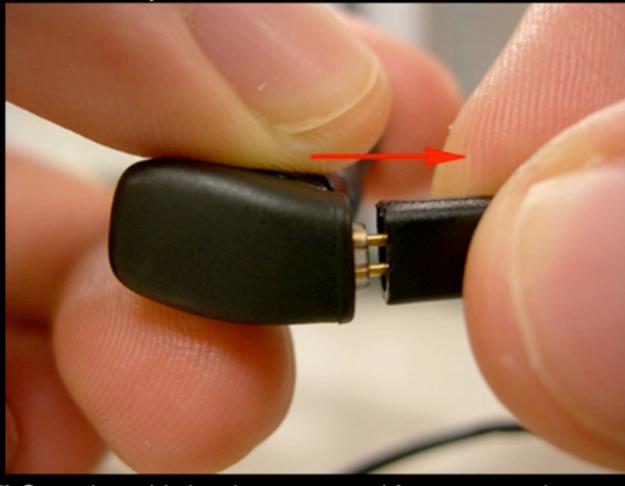



- 4) Once the cable has been removed from one earphone, place the earphone in a visible and safe location on a flat surface.
- 5) Repeat steps 2-4 for the other earphone, then discard the marked and damaged cable.

To install the replacement cable, please do the following:


Install the new cable:

1) Pick up one of the earphones, and identify if it is the Left (L) or Right (R) earphone.

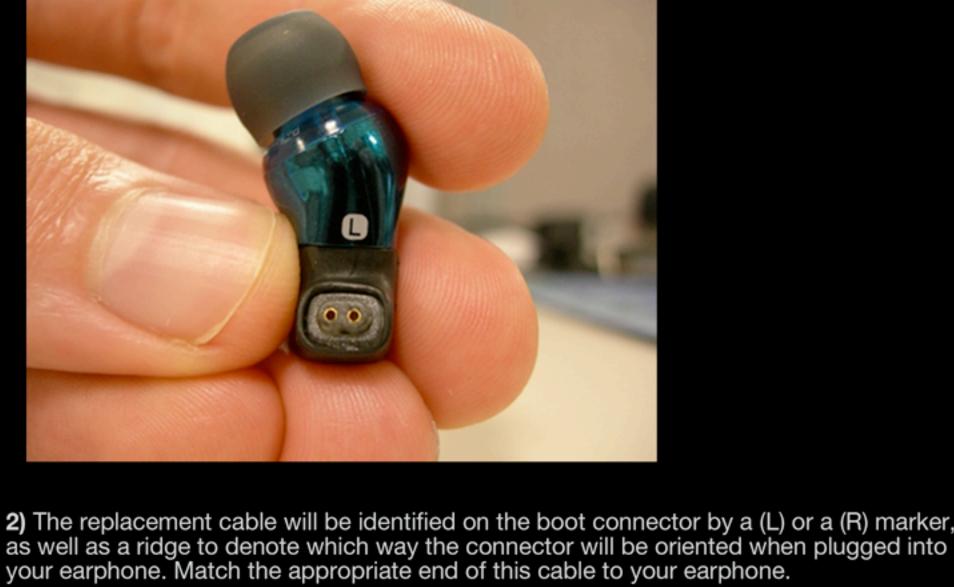

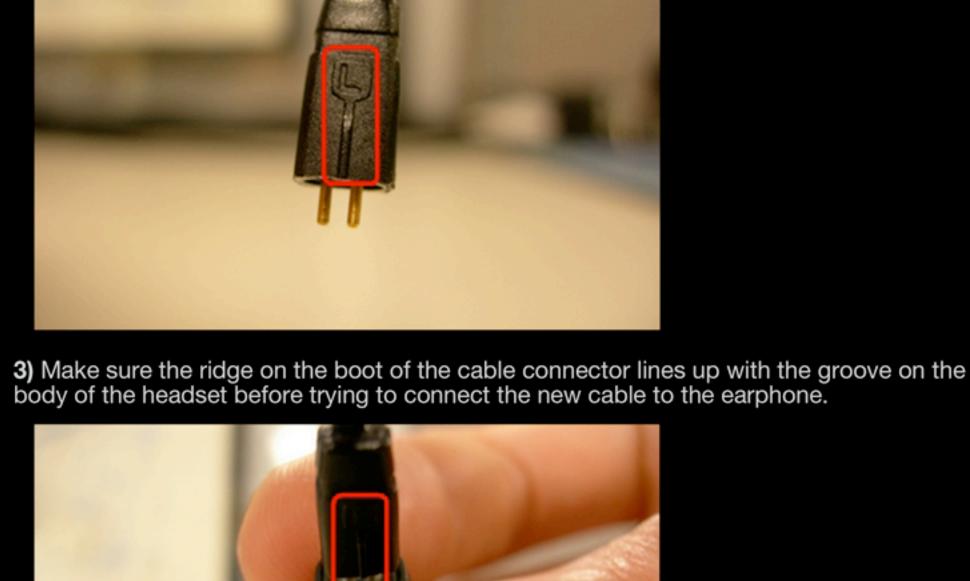



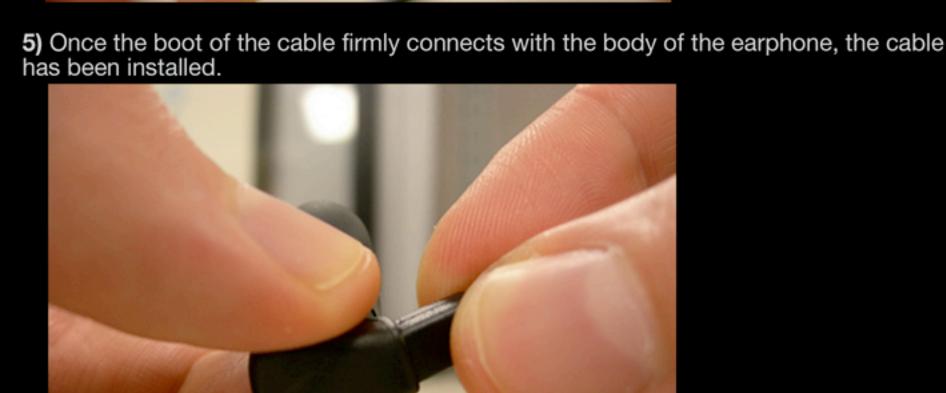

6) Repeat steps 1-5 to attach the other earphone to the cable.
7) Test the earphones on a device with a fully functioning audio jack to make sure the cables were installed properly. In addition, gently wiggle the cable near the jack and the earphones to test for any static or other sound issues.